


Mobile safety barrier

With mobile safety barriers immediate road accident prevention in construction sites is possible. These transportable concrete walls are the ideal restraining systems for all kinds of cars and all kinds of streets. Because of the strong material, the effectiveness, the system width of 50 cm and a weight less than 2000 kg per wall the barrier is the perfect solution to make construction sites safe for all involved persons.

One important factor is that it is easy to open the links of the barriers in a case of emergency. Especially in the road traffic transportable safety barriers should be easily separated from each other. Sometimes even seconds are relevant - assembly and disassembly of the barriers have to work out quickly. When some barriers are damaged they can be replaced without problems.

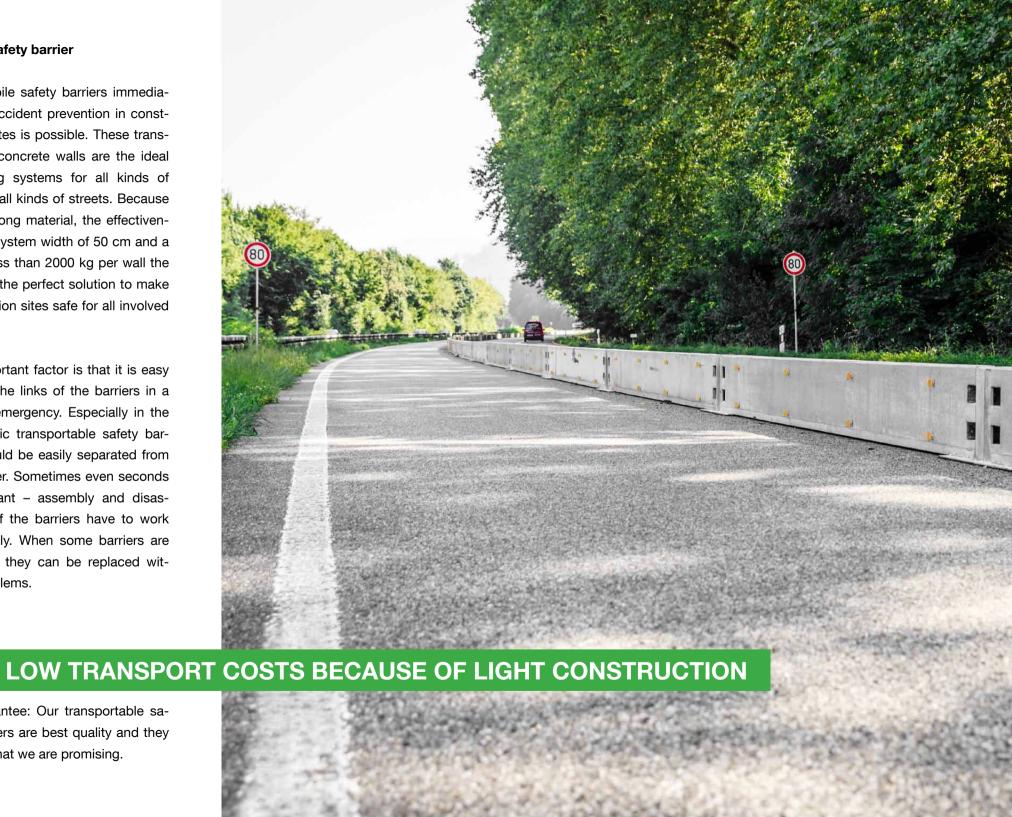

We guarantee: Our transportable safety barriers are best quality and they deliver what we are promising.

Tested according to DIN EN 1317 (anchored)				
Testing	TB 11	TB 41		
Containment level	H1	H3		
Type of vehicle	automobile	truck		
Sphere of influence	0,25 m	0,7 m		
Sphere of influence (class)	W2 = 0.8 m	W4 = 1,3 m		
BASt assessment	2014 7E 57			

Tem	porarv	safety	barrie
10111	porary	Jaicty	Dairie

Our temporary safety barriers are ensuring a comprehensive protection in the road traffic. They are tested and certified according to the European Standard DIN EN 1317. The product attributes are: simple handling but robust and steady. We are able to deliver 78 meters of transportable safety barriers just on one truck. For you that means very low transport costs.

Our transportable safety barriers with an extreme low sphere of influence will be your best decision.

System dimensions				
Test length	96 m			
System width	0,50 m			
System height	0,85 m			
System length	6,00 m			
Planning relevant width	0,16 m			
Lowering length	2,50 m			





Ibotech GmbH & Co. KG 4. Industriestraße 16 68766 Hockenheim

Tel.: 06205 / 28 67 210 Fax: 06205 / 28 67 229 e-Mail: info@ibotech.eu